




Professional Loudspeaker

*Epic T12*

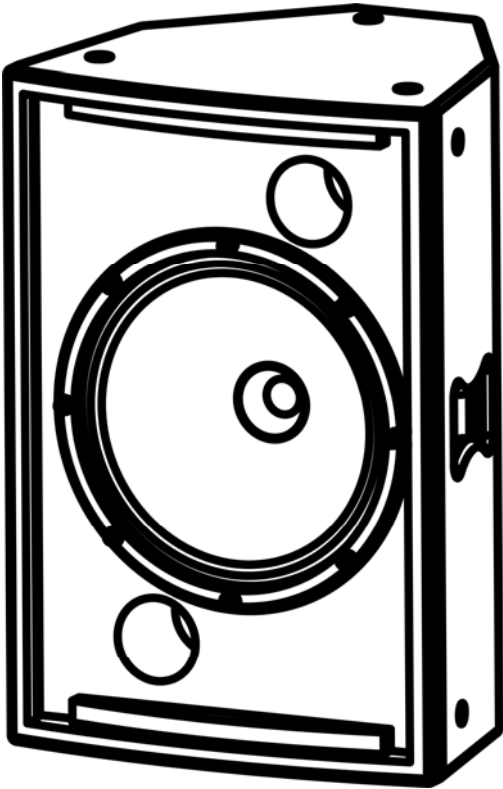

USER MANUAL

**Professional Loudspeaker Technology**

<b>CONTENTS</b>	<b>Page No.</b>
<b>1. INTRODUCTION</b>	<b>2</b>
<b>2. FEATURES</b>	<b>2</b>
<b>3. CARE &amp; MAINTENANCE</b>	<b>3</b>
<b>4. TECHNICAL SPECIFICATIONS</b>	<b>4</b>
<b>5. PRODUCT DISPOSAL</b>	<b>5</b>



# **1. INTRODUCTION**

---

Thank you for purchasing this W Audio professional loudspeaker product. The Epic T12 is a wide bandwidth two way passive coaxial speaker system with high performance. The coaxial series loudspeaker is a range of portable loudspeaker enclosures designed for a variety of portable sound reinforcement and club applications. It is perfect for live club performance, night club installation, conference room, multifunction hall and stage monitoring.

# **2. FEATURES**

---

- 1. MDF trapezoid cabinet with scratch-resistance textured paint.**
- 2. High intensity cabinet construction.**
- 3. 10" high power LF speaker.**
- 4. One compression driver with 1" throat.**
- 5. 80° X 80° constant directivity horn.**
- 6. Crossover: passive 12db octave and HF unit equalizer.**
- 7. Two durable handle on the rear for easy carrying.**
- 8. 12 X M8 flying points**

### **3.**



## **CARE & MAINTENANCE**


---

- 1) Do not use this speaker near water.**
- 2) Clean only with dry cloth.**
- 3) Do not block any ventilation openings. Install in accordance with the instructions.**
- 4) Do not install near any heat sources such as radiators, stoves, or other apparatus (including amplifiers) that produce heat.**
- 5) Protect the power cable from being walked on or pulled particularly at plugs.**
- 6) Only use attachments or accessories specified by the manufacturer.**
- 7) Do not connect this speaker during lightning storms or when being unused for a long period.**
- 8) Choose a suitable cable for the loudspeaker, cable which is too small will not give a high output.**

## 4. TECHNICAL SPECIFICATIONS

<b>Model:</b>	<b>Epic T12</b>
<b>Compression Driver:</b>	<b>1 x1" Throat</b>
<b>Woofers:</b>	<b>1 x10" coaxial low/mid range speaker (Ferrite )</b>
<b>Power (AES):</b>	<b>500W</b>
<b>Impedance:</b>	<b>8 Ω</b>
<b>Sensitivity(1W/m) f&gt;100Hz:</b>	<b>95dB</b>
<b>Max sound Pressure at 1m:</b>	<b>119dB continuous, 122dB peak</b>
<b>Frequency response:</b>	<b>65Hz-----19kHz</b>
<b>Nominal directivity@-6dB (H x V):</b>	<b>80° x 80°</b>
<b>Cabinet</b>	<b>15mm MDF</b>
<b>Accessory</b>	<b>12x M8 flying points</b>
<b>Dimensions (W x D x H)</b>	<b>320 x 300 x 480 mm</b>
<b>Net weight</b>	<b>12Kg</b>

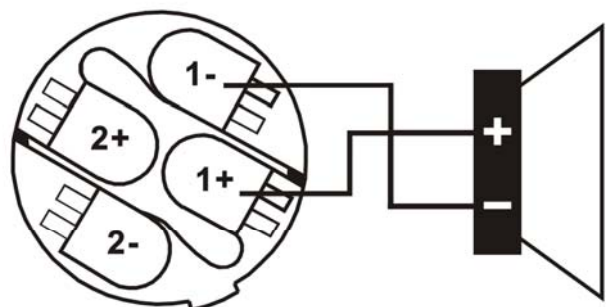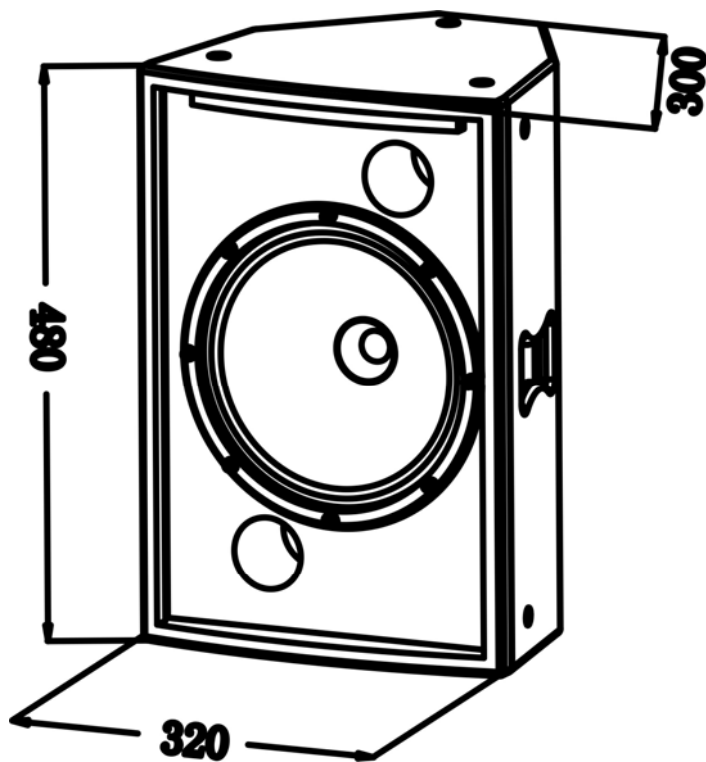

1+/1-: 

2+/2-: NC

SPEAKER WIRE CONNECTION

**English*****Correct Disposal of This Product  
(Waste Electrical & Electronic Equipment)***

**(Applicable in the European Union and other European countries with separate collection systems)**

This marking shown on the product or its literature, indicates that it should not be disposed with other household wastes at the end of its working life. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate this from other types of wastes and recycle it responsibly to promote the sustainable reuse of material resources.

Household users should contact either the retailer where they purchased this product, or their local government office, for details of where and how they can take this item for environmentally safe recycling.

Business users should contact their supplier and check the terms and conditions of the purchase contract. This product should not be mixed with other commercial wastes for disposal.

**Specification is subject to change without prior notice.**

---