




STROBE IGNITOR

BF-04D

General Instructions:

- ◆ An innovative, user friendly controller controls DMX and analog strobes at the same time.
- ◆ Comes with 10 different chase patterns, providing both Auto and Sound modes for the show.
- ◆ Chase Speed and Dimmer adjustable.
- ◆ Blackout, Full on and Single flash functions.
- ◆ Power supply: DC 9V 500mA Min.
- ◆ Size: 210 X 133 X 77 mm
- ◆ Weight: 0.8 kg

Function Instructions :

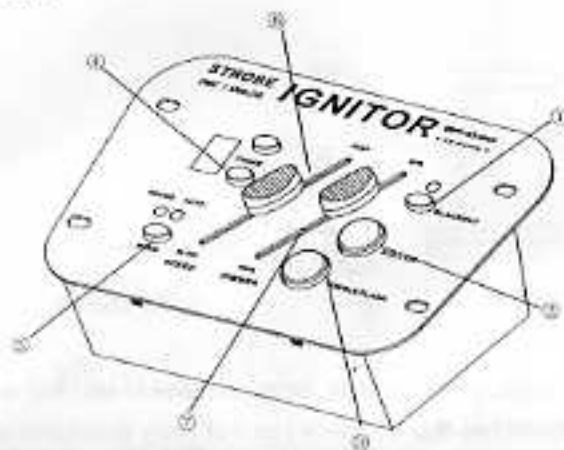

- | | |
|-----------------|--|
| 1. Blackout | Blackout the fixtures. |
| 2. Full On | All strobes will light on at once. |
| 3. Single flash | All strobes will flash each time you press the button under Blackout mode. |
| 4. Chase | Press the up/down button to select 10 chase patterns. |
| 5. Mode | 1. LED in green indicating it's in Sound mode. 2. LED in yellow indicating it's in Auto mode. |
| 6. Speed | Use to adjust chase speed in auto mode. |
| 7. Dimmer | Use to adjust dimmer intensity within the range of 20% to 100% (only for DMX strobe) |

Rear view



- | | |
|---------------|--|
| Power Switch | Turn On/Off the power. |
| DC Input | DC 9V 500mA min. |
| Analog Strobe | For sending analog signal to the analog strobe, signal output +12DC 1/4" Mono Jack. |
| DMX Strobe | For sending DMX512 signal to the DMX strobe. Channel 1 is speed and channel 2 is dimmer. |

